

用户手册

NERU99ec

(3) 意外因素或人为行为导致产品损坏。如:进液、摔损、输入不合适电压、过度挤压、主板变形等。

(1) 机器、电池、电源适配器、电脑数据线质保期为12个月。

(1) 退换货、送修途中由于运输、装卸所导致的损坏。

(5) 保修凭证与产品型号不符或保修凭证被涂改。

2.如下情形非保修范围,如需提供维修服务,可酌情收取物料及服务费用:

3) 质保范围是指产品在正常使用下出现问题。 备注:外观问题不属于保修范围

(3) 因产品不符合保修条件需收取费用的,授权服务中心将向消费者收取维修费。

(2) 在质保期内,非人为损坏,免费维修。

┗ 电话:400-830-4882

打开包装后,您应该会看到下列标准项目:

·M80R加固平板电脑·电源线·电源适配器

本章首先教导您如何将设备准备好,以便让您开始工作。接着概略地介绍设备的外观和组件。

👤 地址:深圳市坪山区光科一路8号亿道大厦

□ 邮编:518122

电源适配器,若有明显的硬物损伤、裂痕、断脚、严重变形,电线破损、断线、裸芯等现象。 (4) 未按使用说明书要求安装、使用、维护、保管导致的产品故障或损坏。

(6) 产品铭牌、SN条码、防拆标签被撕掉或被损坏,模糊不清无法识别。 (8) 由于不可抗因素(如火灾、地震、水灾等)而造成的故障或损坏。 (1) 送修前,请您提前备份个人数据。维修过程中可能会造成您个人数据的丢失,我们会保护您的个人隐

*本页内容不得擅自涂改,并请保存产品包装盒,以维护您的合法权益。

深圳市亿道信息股份有限公司

☑ 邮箱:support@onerugged.com

注意: 仅限使用本产品随附的电源适配器。使用其他电源适配器可能会损坏您的设备。

ONERU99ed

第一次开机时必须连接 AC 电源。

1.电源适配器的 DC头 插入设备的DC口内。 2.将电源线的母端口端插入电源适配器,公端口端插入电源插座。 3.电源插座通过适配器为设备供电。现在您可以打开设备电源。





设备外观介 在完成工作之后,您可以关闭电源或者让设备进入睡眠或休眠状态:

[• 电源]→[重启]


注: 1.依照所购买的型号不同,设备外观可能和本手册所显示的结构有所不同。



2D扫描按键(可以定义) 按Home键可切换返回桌面

发出平板的声音

左右扫码键可以快速扫描 连接 USB-C的设备



符号	组件	说明
0	DC充电口	可接5V 3A的适配器进行供电



选配扫码模块 用于固定肩带



将电池取下,在此位置取下卡座, 插入TF 卡+Nano Sim卡,NC卡槽暂时不提任何供功能。

适配器受到外部电压冲击而受损。 ·拔掉插头时,请垂直 90° 插拔,切勿拉扯电线,应用手握着插头拔出。

交流电转换为设备所需的直流电。在连接电源适配器的同时,亦自动为电池充电。适配器输入可在100V至240V AC的电压范围内运作,输出为5Vdc3A/9Vdc2A/12V1.5A。

故障排除/TROUBLESHOOTING

设备问题可以是硬件、软件、或两者共同引起的。当您遭遇问题时,它可能只是一个一般性问题,能够轻易就

本章告诉您在面临一般性问题时,该尝试甚么方法来解决。


· 试着找出问题的来源和类别。

· 确定您在设备开机之前已开启外设设备的电源。

· 如果外接的设备出现问题,请确认所有线路的连接是否正确而且牢固。

·细观察实际的状况。屏幕上是否出现任何信息?指示灯的亮灯情形为何? 当您必须寻求维修人员的帮忙时, 您所提供的信息是越详尽越好。

如果按照本章中的说明进行操作后问题仍然存在,请与授权经销商联系以寻求帮助。

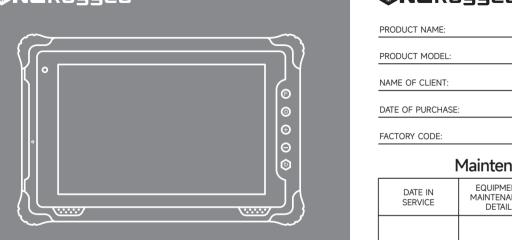

M80R WWW.ONERUGGED.COM

After unpacking, you should see the following standard items: · M80R Rugged Mobile PC Terminal · Power Cord · Power Adapter

ONERUgged

NANCE AIL	MAINTENANCE DATE	MAINTENANCE PERFORMED BY	manual. (5) The warranty certificate does not match the product model or has bee (6) The product nameplate, SN barcode, and tamper-proof label are torn
			blurred and unrecognizable. (7) The product is out of warranty. (8) Failure or damage caused by irresistible factors (such as fire, earthqua 3. Warranty requires a warranty card as proof.
			Repair Service Guide
			(1) Before sending for repair, please back up your personal data in advand lost during the maintenance process. We will protect your personal privac
			responsible for the damage or loss of personal data during the maintenar (2) When sending for repair, the product must be professionally inspected center. After confirming the fault, the service center will determine the co plan. For detected non-faulty products, it will be returned as is.

s been altered. torn off or damaged, making them

(4) Product damage caused by failure to install, use, maintain, and store in accordance with the user


- hquake, flood, etc.).

When you're work done, you can power it off or leaving it in Sleep or Hibernation mode:






graphics shown in this manual.

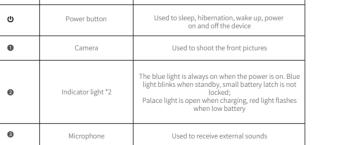




on and off the device	SYMBOL	COMPONENTS	
Used to shoot the front pictures			
	0	Flashlight	
blue light is always on when the power is on. Blue ht blinks when standby, small battery latch is not locked;	0	Camera	
lace light is open when charging, red light flashes when low battery	39	Cover lock	
Used to receive external sounds	9	Battery cover lock	
			$\overline{}$



nd off the device		SYMBOL	COMPONENTS	DESCRIPTION
noot the front pictures		31111502	COMI ONLINIO	DESCRIPTION
		0	Flashlight	Used for lighting
ys on when the power is on. Blue andby, small battery latch is not locked;		0	Camera	Used for photo and video recording
when charging, red light flashes en low battery		66	Cover lock	Lock the battery cover&switch batte
ceive external sounds		0	Battery cover lock	Prevent the internal battery falling o
	1			



l						
SYMBOL	COMPONENTS	DESCRIPTION		0	Type-C port	
•	Flashlight	Used for lighting				
0	Camera	Used for photo and video recording		RIGHT-SIDE C	OMPONENT	
86	Cover lock	Lock the battery cover&switch battery				=
0	Battery cover lock	Prevent the internal battery falling out				_
			1			1

For fixing straps	SYMBOL	COMPONENTS	DESCRIPTION
	0	DC charging port	It can be connected to 5V 3A adapter for powers



DESCRIPTION

DESCRIPTION	STWIDOL	COMPONENTS	DESCRIPTION
The left key for quickly barcodes scan	0	Scaning Window	Optional scan code n
Connect audio devices	0	Shoulder strap hole	For fixing shoulder s



SYMBOL	COMPONENT
0	Pogo pin

solving common computer problems

If any problem persists after you follow the instructions in this chapter, contact an authorized dealer for help.